Principles of Geotechnical Engineering 8th Edition Das Solutions Manual


Full Download: http://testbanklive.com/download/principles-of-geotechnical-engineering-8th-edition-das-solutions-manual/

Chapter 2

2.1
$$C_u = \frac{D_{60}}{D_{10}} = \frac{0.42}{0.16} = 2.625 \approx 2.63$$
; $C_c = \frac{D_{30}^2}{(D_{60})(D_{10})} = \frac{0.21^2}{(0.42)(0.16)} = 0.656 \approx 0.666$

2.2
$$C_u = \frac{D_{60}}{D_{10}} = \frac{0.81}{0.27} = 3.0; \ C_c = \frac{D_{30}^2}{(D_{60})(D_{10})} = \frac{0.41^2}{(0.81)(0.27)} = 0.768 \approx 0.77$$

Sieve	Mass of soil retained	Percent retained	Percent
no.	on each sieve (g)	on each sieve	finer
4	28	4.54	95.46
10	42	6.81	88.65
20	48	7.78	80.88
40	128	20.75	60.13
60	221	35.82	24.31
100	86	13.94	10.37
200	40	6.48	3.89
Pan	24	3.89	0.00
	Σ617 g		

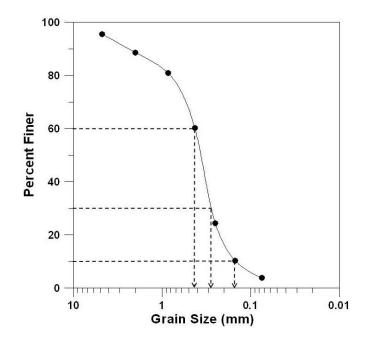

1

© 2014 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

Full download all chapters instantly please go to Solutions Manual, Test Bank site: testbanklive.com


b.
$$D_{10} = 0.16 \text{ mm}; D_{30} = 0.29 \text{ mm}; D_{60} = 0.45 \text{ mm}$$

c.
$$C_u = \frac{D_{60}}{D_{10}} = \frac{0.45}{0.16} = 2.812 \approx 2.81$$

d.
$$C_c = \frac{D_{30}^2}{(D_{60})(D_{10})} = \frac{0.29^2}{(0.45)(0.16)} = 1.168 \approx 1.17$$

2.4	4	а

Sieve	Mass of soil retained	Percent retained	Percent
no.	on each sieve (g)	on each sieve	Finer
4	0	0.0	100.00
6	30	6.0	94.0
10	48.7	9.74	84.26
20	127.3	25.46	58.80
40	96.8	19.36	39.44
60	76.6	15.32	24.12
100	55.2	11.04	13.08
200	43.4	8.68	4.40
Pan	22	4.40	0.00
	Σ 500 g		

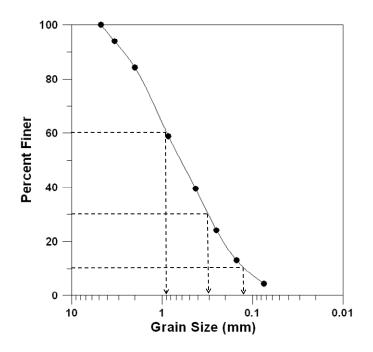

b. $D_{10} = 0.13 \text{ mm}; D_{30} = 0.3 \text{ mm}; D_{60} = 0.9 \text{ mm}$


c.
$$C_u = \frac{D_{60}}{D_{10}} = \frac{0.9}{0.13} = 6.923 \approx 6.92$$

d. $C_c = \frac{D_{30}^2}{(D_{60})(D_{10})} = \frac{0.3^2}{(0.9)(0.13)} = 0.769 \approx 0.77$

2.5

a.

Sieve	Mass of soil retained	Percent retained	Percent
no.	on each sieve (g)	on each sieve	finer
4	0	0.0	100.00
10	40	5.49	94.51
20	60	8.23	86.28
40	89	12.21	74.07
60	140	19.20	54.87
80	122	16.74	38.13
100	210	28.81	9.33
200	56	7.68	1.65
Pan	12	1.65	0.00
	Σ729 g		

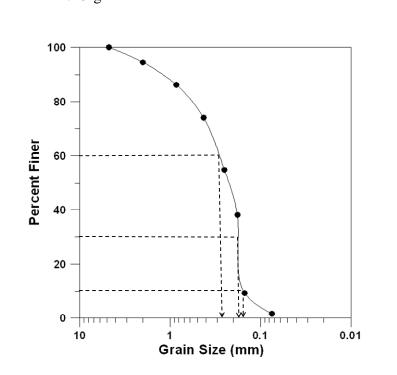

b. $D_{10} = 0.17 \text{ mm}; D_{30} = 0.18 \text{ mm}; D_{60} = 0.28 \text{ mm}$


c. $C_u = \frac{D_{60}}{D_{10}} = \frac{0.28}{0.17} = 1.647 \approx 1.65$

© 2014 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

d.
$$C_c = \frac{D_{30}^2}{(D_{60})(D_{10})} = \frac{0.18^2}{(0.28)(0.17)} = 0.68$$

2.6	5	a.

g) on each sieve 0.0 0.0 0.0 1.02	finer 100.00 100.00 100.00
0.0 0.0	100.00 100.00
0.0	100.00
1.00	00 10
1.82	98.18
49.88	48.3
35.96	12.34
4.54	7.8
3.1	4.7
4.7	0.00
	3.1

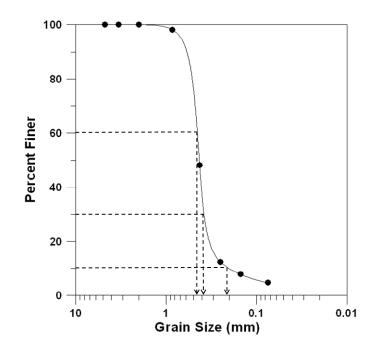


b. $D_{10} = 0.21 \text{ mm}; D_{30} = 0.39 \text{ mm}; D_{60} = 0.45 \text{ mm}$

c.
$$C_u = \frac{D_{60}}{D_{10}} = \frac{0.45}{0.21} = 2.142 \approx 2.14$$

d. $C_c = \frac{D_{30}^2}{(D_{60})(D_{10})} = \frac{0.39^2}{(0.45)(0.21)} = 1.609 \approx 1.61$

© 2014 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.

2.7 a.




- b. Percent passing 2 mm = 100
 Percent passing 0.06 mm = 73
 Percent passing 0.002 mm = 9
- c. Percent passing 2 mm = 100
 Percent passing 0.05 mm = 68
 Percent passing 0.002 mm = 9
- d. Percent passing 2 mm = 100Percent passing 0.075 mm = 80Percent passing 0.002 mm = 9

GRAVEL: 100 - 100 = **0%** SAND: 100 - 73 = **27%** SILT: 73 - 9 = **64%** CLAY: 9 - 0 = **9%**

GRAVEL: 100 - 100 = **0%** SAND: 100 - 68 = **32%** SILT: 68 - 9 = **59%** CLAY: 9 - 0 = **9%**

GRAVEL: 100 - 100 = **0%** SAND: 100 - 80 = **20%** SILT: 80 - 9 = **71%** CLAY: 9 - 0 = **9%** 2.8 a.

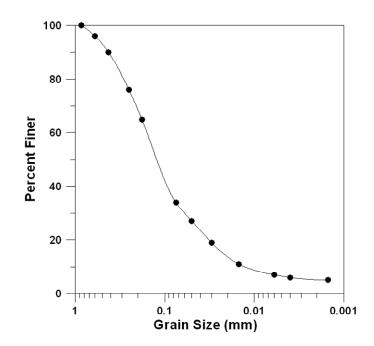


- b. Percent passing 2 mm = 100
 Percent passing 0.06 mm = 30
 Percent passing 0.002 mm = 5
- c. Percent passing 2 mm = 100 Percent passing 0.05 mm = 28 Percent passing 0.002 mm = 5
- d. Percent passing 2 mm = 100
 Percent passing 0.075 mm = 34
 Percent passing 0.002 mm = 5

GRAVEL: 100 - 100 = **0%** SAND: 100 - 30 = **70%** SILT: 70 - 5 = **65%** CLAY: 5 - 0 = **5%**

GRAVEL: 100 - 100 = **0%** SAND: 100 - 28 = **72%** SILT: 72 - 5 = **67%** CLAY: 5 - 0 = **5%**


GRAVEL: 100 - 100 = **0%** SAND: 100 - 34 = **66%** SILT: 66 - 5 = **61%** CLAY: 5 - 0 = **5%** 2.9 a.

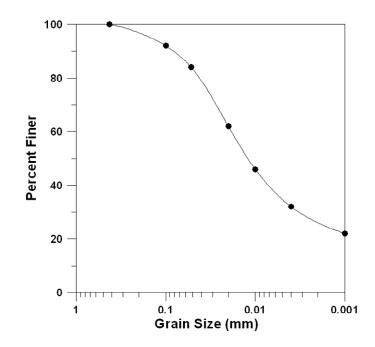

- b. Percent passing 2 mm = 100
 Percent passing 0.06 mm = 84
 Percent passing 0.002 mm = 28
- GRAVEL: 100 100 = **0%** SAND: 100 - 84 = **16%** SILT: 84 - 28 = **56%** CLAY: 28 - 0 = **28%**
- c. Percent passing 2 mm = 100 Percent passing 0.05 mm = 83 Percent passing 0.002 mm = 28
- d. Percent passing 2 mm = 100Percent passing 0.075 mm = 90Percent passing 0.002 mm = 28

GRAVEL: 100 - 100 = **0%** SAND: 100 - 83 = **17%** SILT: 83 - 28 = **55%** CLAY: 28 - 0 = **28%**

GRAVEL: 100 - 100 = **0%** SAND: 100 - 90 = **10%** SILT: 90 - 28 = **62%** CLAY: 28 - 0 = **28%** 2.10 a.

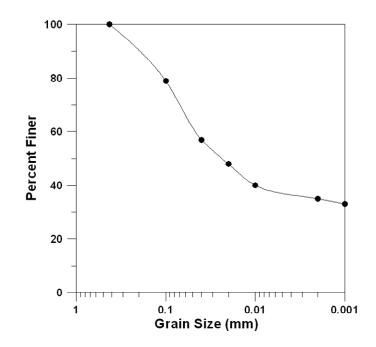

- b. Percent passing 2 mm = 100Percent passing 0.06 mm = 65Percent passing 0.002 mm = 35
- GRAVEL: 100 100 = **0%** SAND: 100 - 65 = **35%** SILT: 65 - 35 = **30%** CLAY: 35 - 0 = **35%**
- c. Percent passing 2 mm = 100Percent passing 0.05 mm = 62Percent passing 0.002 mm = 35
- d. Percent passing 2 mm = 100Percent passing 0.075 mm = 70Percent passing 0.002 mm = 35

GRAVEL: 100 - 100 = **0%** SAND: 100 - 62 = **38%** SILT: 62 - 35 = **27%** CLAY: 35 - 0 = **35%**

GRAVEL: 100 - 100 = **0%** SAND: 100 - 70 = **30%** SILT: 70 - 35 = **35%** CLAY: 35 - 0 = **35%**

2.11 $G_s = 2.7$; temperature = 24°; time = 60 min; L = 9.2 cm

Eq. (2.5):
$$D \text{ (mm)} = K \sqrt{\frac{L \text{ (cm)}}{t \text{ (min)}}}$$

From Table 2.6 for $G_s = 2.7$ and temperature = 24° , K = 0.01282

$$D = 0.01282 \sqrt{\frac{9.2}{60}} = 0.005 \,\mathrm{mm}$$

2.12 $G_s = 2.75$; temperature = 23°C; time = 100 min; L = 12.8 cm

Eq. (2.5):
$$D (mm) = K \sqrt{\frac{L (cm)}{t (min)}}$$

From Table 2.6 for $G_s = 2.75$ and temperature = 23°, K = 0.01279

$$D = 0.01279 \sqrt{\frac{12.8}{100}} = 0.0046 \,\mathrm{mm}$$

CRITICAL THINKING PROBLEM

2.C.1 a. Soil A:
$$C_u = \frac{D_{60}}{D_{10}} = \frac{11}{0.6} = 18.33$$
; $C_c = \frac{D_{30}^2}{(D_{60})(D_{10})} = \frac{5^2}{(11)(0.6)} = 3.78$

Soil B:
$$C_u = \frac{D_{60}}{D_{10}} = \frac{7}{0.2} = 35$$
; $C_c = \frac{D_{30}^2}{(D_{60})(D_{10})} = \frac{2.1^2}{(7)(0.2)} = 3.15$

Soil C:
$$C_u = \frac{D_{60}}{D_{10}} = \frac{4.5}{0.15} = 30$$
; $C_c = \frac{D_{30}^2}{(D_{60})(D_{10})} = \frac{1^2}{(4.5)(0.15)} = 1.48$

- b. Soil A is coarser than Soil C. A higher percentage of soil C is finer than any given size compared to Soil A. For example, about 15% is finer than 1 mm for Soil A, whereas almost 30% is finer than 1 mm in case of soil C.
- c. Particle segregation may take place in aggregate stockpiles such that there is a separation of coarser and finer particles. This makes representative sampling difficult. Therefore Soils A, B, and C demonstrate quite different particle size distribution.

Principles of Geotechnical Engineering 8th Edition Das Solutions Manual

Full Download: http://testbanklive.com/download/principles-of-geotechnical-engineering-8th-edition-das-solutions-manual/

 d. Soil A:	GRAVEL: 100 – 29 = 71%
Percent passing 4.75 mm = 29	SAND: 29 – 1 = 28%
Percent passing 0.075 mm = 1	FINES: 1 – 0 = 1%
Soil B:	GRAVEL: 100 – 45 = 55%
Percent passing 4.75 mm = 45	SAND: 45 – 2 = 43%
Percent passing 0.075 mm = 2	FINES: 2 – 0 = 2%
Soil C:	GRAVEL: $100 - 53 = 47\%$
Percent passing 4.75 mm = 53	SAND: $47 - 3 = 44\%$
Percent passing 0.075 mm = 3	FINES: $3 - 0 = 3\%$

© 2014 Cengage Learning. All Rights Reserved. May not be scanned, copied or duplicated, or posted to a publicly accessible website, in whole or in part.