

3-1

$$\sigma = \frac{P}{A} = \frac{10 \times 10^3}{\pi/4 d^2} \leq 100$$

$$d \geq 11.28 \text{ mm}$$

$$\epsilon = \frac{\sigma}{E} = \frac{\frac{10 \times 10^3}{\pi/4 d^2}}{45 \times 10^3} \leq 0.1\%$$

$d \geq 16.82 \text{ mm}$ (governs)
magnesium alloy elastic modulus:
45 GPa for tension or compression.

3-2

$$(a) A_{req} = \frac{5 \times 10^3}{150} = 33.33 \text{ mm}^2$$

$$A_{req} = \frac{PL}{\Delta E} = \frac{5 \times 10^3 \times 10 \times 10^3}{4 \times 210 \times 10^3} = 59.52 \text{ mm}^2$$


(governs)

→ stiffness control.

$$(b) P = K \Delta$$

$$\Rightarrow K = \frac{P}{\Delta} = \frac{5}{4} = 1.25 \text{ kN/mm}$$

3-3

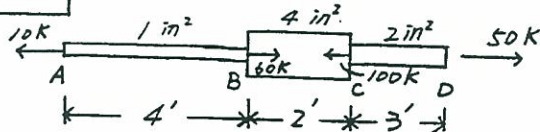

$$(a) \Sigma F = 0, \quad P_2 = 60 \text{ k}$$

$$(b) \Delta = \left(\frac{PL}{AE} \right)_{AB} + \left(\frac{PL}{AE} \right)_{BC} + \left(\frac{PL}{AE} \right)_{CD}$$

$$= \frac{10(4 \times 12)}{1(30 \times 10^3)} + \frac{(-50)(2 \times 12)}{4(30 \times 10^3)} + \frac{50(3 \times 12)}{2(30 \times 10^3)}$$

$$= 0.016 - 0.010 + 0.03$$

$$= 0.036 \text{ in}$$


$$(d) f_{eff} = \Sigma \frac{L_i}{(EA)_i}$$

$$= \frac{1}{30 \times 10^3} \left(\frac{4 \times 12}{1} + \frac{2 \times 12}{4} + \frac{3 \times 12}{2} \right)$$

$$= 2.4 \times 10^{-3} \text{ in/k}$$

$$K_{eff} = \frac{1}{2.4 \times 10^{-3}} = 416.67 \text{ k/in}$$

(c)

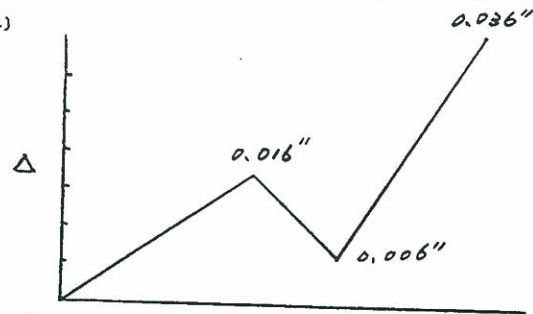




3-4

$$\Delta = \frac{PL}{AE} = \frac{mgL}{AE}$$


$$f = \frac{1}{2\pi} \sqrt{\frac{g}{\Delta}} = \frac{1}{2\pi} \sqrt{\frac{AE}{mL}}$$

$$= \frac{1}{2\pi} \sqrt{\frac{\pi \times 20^2 \times 180 \times 10^3}{2 \times 0.4}} = 1.3 \text{ kHz}$$

3-5

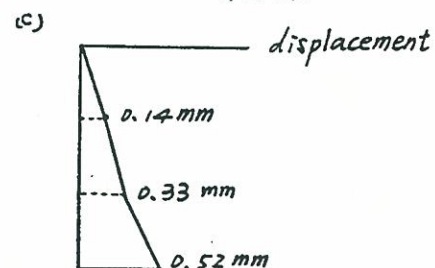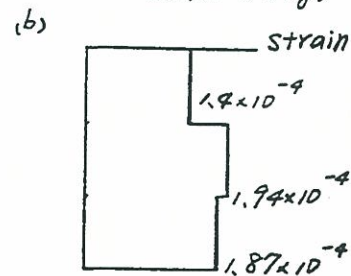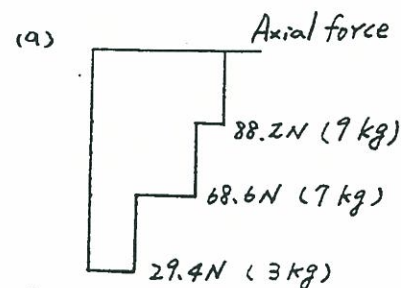

3-6

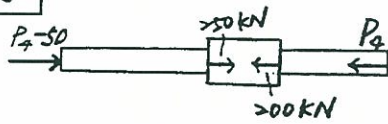


$$\Delta = \sum \left(\frac{PL}{EA} \right)_i$$

$$= - \frac{(P_4 - 50) \times 2000}{1000 \times E} - \frac{(P_4 + 200) \times 1000}{2000 \times E} - \frac{P_4 \times 1500}{1000 \times E}$$

$$= 0$$


$$\rightarrow P_4 = 0$$

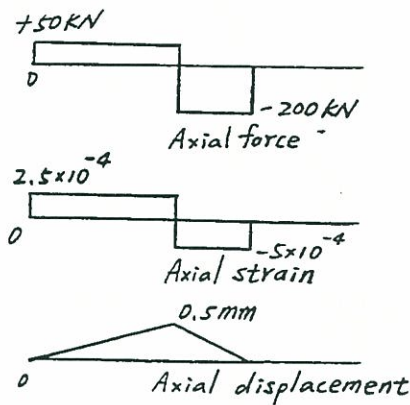

$$\Delta_3 = \Delta_1 + \Delta_2 + \Delta_3$$

$$= 1.0 \times 10^{-4} + (1 \times 10^{-4})(0.4)$$

$$= 1.4 \times 10^{-4} \text{ m}$$

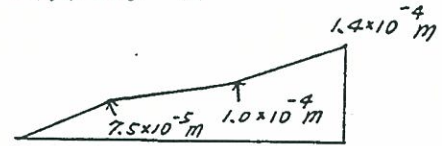

Axial displacement

$$K = \frac{P}{\Delta} \quad (\text{use unit Force})$$

$$\Delta = \frac{P}{E} \left(\frac{L_1}{A_1} + \frac{L_2}{A_2} + \frac{L_3}{A_3} \right)$$

$$= \frac{1}{200 \times 10^6} \left(\frac{0.6}{2 \times 10^{-4}} + \frac{0.5}{1 \times 10^{-4}} + \frac{0.4}{1.5 \times 10^{-4}} \right)$$

$$= 5.33 \times 10^{-5}$$

$$\Rightarrow K = \frac{P}{\Delta} = \frac{1}{5.33 \times 10^{-5}} = 1.875 \times 10^4 \text{ kN/m}$$

3-8

$$(a) \sigma_{AL} = E \epsilon = 70 \times 10^3 \times 873 \times 10^{-6}$$

$$= 61.1 \text{ MPa} = \sigma_{st}$$


$$P = \frac{\pi}{4} d^2 \sigma = \frac{\pi}{4} \times 50^2 \times 61.1 = 120 \text{ kN}$$

$$(b) \epsilon_{st} = \frac{\sigma_{st}}{E_{st}} = \frac{61.1}{200 \times 10^3} = 305.5 \times 10^{-6}$$

$$\Delta = [(305.5 \times 1500) + (873 \times 500)] \times 10^{-6}$$

$$= 0.89 \text{ mm}$$


3-7

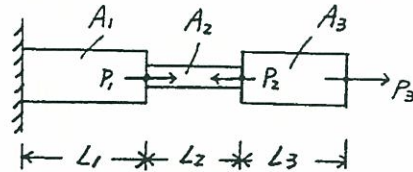

$$P_1 = 4 \text{ kN} \quad L_1 = 0.6 \text{ m} \quad A_1 = 2 \times 10^{-4} \text{ m}^2$$

$$P_2 = 2 \text{ kN} \quad L_2 = 0.5 \text{ m} \quad A_2 = 1 \times 10^{-4} \text{ m}^2$$

$$P_3 = 3 \text{ kN} \quad L_3 = 0.4 \text{ m} \quad A_3 = 1.5 \times 10^{-4} \text{ m}^2$$

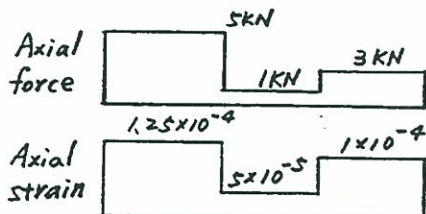


$$\Delta = \frac{PL}{AE} = \epsilon L$$

$$\Delta_1 = 1.25 \times 10^{-4} (0.6) = 7.5 \times 10^{-5} \text{ m}$$

$$\Delta_2 = \Delta_1 + \Delta_2 = (7.5 \times 10^{-5}) + (5 \times 10^{-5})(0.5)$$

$$= 1.0 \times 10^{-4} \text{ m}$$

3-9

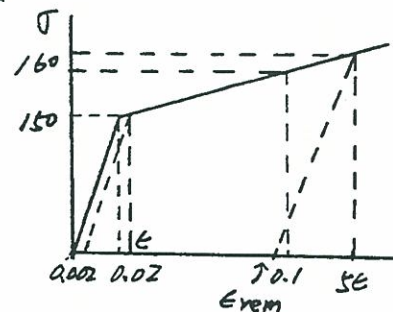

$$125(0.02 + \epsilon) = 7500 \times \epsilon$$

$$x = 0.00034$$

$$\epsilon = 0.0034 + 0.22 = 0.2234$$


$$5\epsilon = 0.1117$$

$$\sigma = 150 + (0.1117 - 0.02) \times 125 = 161.46 \text{ ksi}$$

$$F = 161.46 \times 5 \times 0.2 = 32.29 \text{ kN}$$

$$\epsilon_{rem} = 0.1117 - \frac{161.46 \times 5}{7500} = 0.09$$

$$\Delta_{rem} = 0.09 \times 600 = 54 \text{ mm}$$




3-10

$$(a) \Delta_{AL} = \alpha L \Delta T = 23.2 \times 10^{-6} \times 200 \times 100 = 0.464 \text{ mm}$$

$$\Delta_{st} = \alpha_{st} L_{st} \Delta T = 11.7 \times 10^{-6} \times 300 \times 100 = 0.351 \text{ mm}$$

$$\text{Inclination} \approx \frac{0.464 - 0.351}{400} = 2.83 \times 10^{-4} \text{ rad}$$

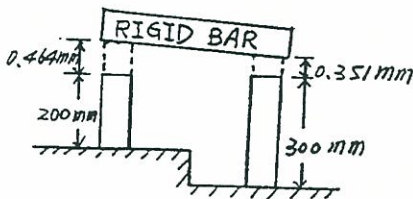

$$(b) \Delta = \frac{PL}{EA} = \frac{\sigma L}{E} \Rightarrow \sigma = \frac{E \Delta}{L}$$


$$\sigma_{AL} = \frac{\Delta_{AL} E_{AL}}{L} = \frac{0.464 \times 75 \times 10^3}{200}$$

$$= 174 \text{ MPa}$$

$$\sigma_{st} = \frac{\Delta_{st} E_{st}}{L_{st}} = \frac{0.351 \times 200 \times 10^3}{300}$$

$$= 234 \text{ MPa}$$

3-11

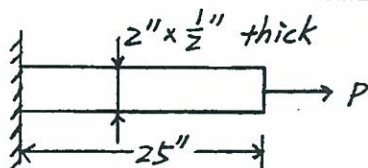

$$\Delta_x = 0.5 \times 10^{-3} \text{ in}$$

$$\epsilon_x = \frac{-0.3 \times 10^{-3}}{2} = -0.15 \times 10^{-3}$$

$$\nu = \frac{0.15 \times 10^{-3}}{\epsilon_a} = 0.25$$

$$\epsilon_a = 6 \times 10^{-4}$$

$$\sigma = E \epsilon_a = (30 \times 10^3) \times 6 \times 10^{-4} = 18 \text{ ksi}$$

$$P = 18 \times 2 \times \frac{1}{2} = 18 \text{ k}$$

$$\Delta = 25 \times 6 \times 10^{-4} = 0.015 \text{ in}$$

3-12

$$\epsilon_x = \frac{-16 \times 10^{-3}}{180} = -8.9 \times 10^{-5}$$

$$\Rightarrow 8.89 \times 10^{-5} = -\nu \frac{\sigma_y}{E}$$

$$\sigma_y = \frac{8.89 \times 10^{-5} \times 2 \times 10^5}{0.25} = 71.2 \text{ N/mm}^2$$

$$P_{a-a} = \sigma_y A = 71.2 \times 180 \times 10 = 12.8 \times 10^4 \text{ N}$$

$$2g \times 400 = P_{a-a}$$

$$g = \frac{12.8 \times 10^4}{800} = 160 \text{ N/mm}$$

$$P_x = 2gx = 2 \times 160x = 320x \text{ N}$$

$$\Delta = \int \frac{P_x dx}{AE} = \frac{320}{180 \times 10 \times 2 \times 10^{-5}} \times \frac{x^2}{2} \Big|_0^{2000}$$

$$= 1.8 \text{ mm}$$

3-13

$$(a) F = \int_0^L f dy = \int_0^L k y^2 dy = \frac{k L^3}{3}$$

$$k = \frac{3F}{L^3}$$

$$dF = f dy = k y^2 dy$$

$$P = \int_0^y dP = \int_0^y k y^2 dy = \frac{k y^3}{3} = \frac{y^3}{L^3} F$$

$$\Delta = \int_0^L \frac{P}{AE} dy = \int_0^L \frac{F}{AF} \frac{y^3}{L^3} dy = \frac{FL}{4AE}$$

$$(b) \Delta = \frac{400 \times 10^3 (10 \times 10^3)}{4 (64000) (10^6)}$$

$$= 1.56 \text{ mm}$$

3-14

$$(a) \Delta_{co} = \frac{PL}{AE} = \frac{\frac{2}{3} \times 2000 \times 60}{0.1 \times 20 \times 10^6} = 0.04"$$

$$\Delta_{AL} = \frac{PL}{AE} = \frac{\frac{1}{3} \times 2000 \times 100}{0.2 \times 10 \times 10^6} = 0.033"$$



$$\Delta_w = \Delta_{co} - \frac{1}{3} (\Delta_{co} - \Delta_{AL})$$

$$= 0.04 - \frac{1}{3} (0.04 - 0.033)$$


$$= 0.038"$$

$$(b) \Delta_{co} = \Delta_{AL}$$

$$\Rightarrow \left(\frac{PL}{AE} \right)_{AL} = \left(\frac{PL}{AE} \right)_{co}$$

$$P_{AL} = \frac{E_{AL} A_{AL}}{L_{AL}} \times \frac{L_{co}}{E_{co} A_{co}} P_{co}$$

$$= \frac{10 \times 10^6 \times 0.2}{100} \times \frac{60}{20 \times 10^6 \times 0.1} P_{co} = 0.6 P_{co}$$



$$P_{co} + P_{AL} = 2000$$

$$1.6 P_{co} = 2000$$


$$P_{co} = 1250 \text{ lb}$$

$$\sum M_o = 0 \Rightarrow 1250 \times 30 = 2000 \times x$$

$$x = 18.75 \text{ inch from the right end}$$

3-15

$$\Delta_B = 0 \quad \frac{WL}{2AE} = \frac{PL}{AE}, \quad P = \frac{WT}{2}$$

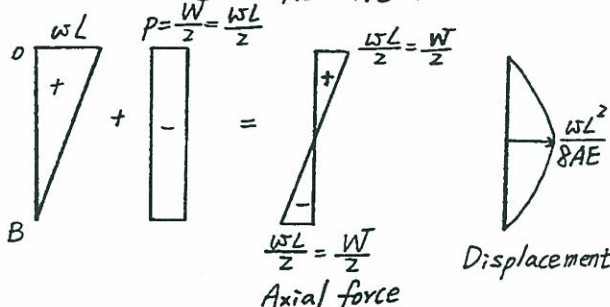

3-16

(a) subdivide L into 4 segments

$$\Delta_4 = \sum_{i=1}^4 \frac{P_i L_i}{EA}$$

$$= \frac{1}{EA} \times \frac{L}{4} \left(W + \frac{3}{4}W + \frac{2}{4}W + \frac{1}{4}W \right)$$

$$= \frac{1}{EA} \times \frac{L}{4} \times \frac{10}{4} W = \frac{5WL}{8EA}$$

(b) subdivide L into 10 segments

$$\Delta_{10} = \sum_{i=1}^{10} \frac{P_i L_i}{EA}$$

$$= \frac{1}{EA} \times \frac{L}{10} \times \frac{1}{10} (W + 2W + 3W + \dots + 10W)$$

$$= \frac{L}{EA} \times \frac{55}{100} W = \frac{11WL}{20EA}$$

(c) subdivide L into 20 segments


$$\Delta_{20} = \sum_{i=1}^{20} \frac{P_i L_i}{EA}$$

$$= \frac{1}{EA} \times \frac{L}{20} \times \frac{1}{20} (W + 2W + \dots + 20W)$$

$$= \frac{L}{EA} \times \frac{210W}{400} = \frac{21WL}{40EA}$$

$$\therefore \Delta_4 > \Delta_{10} > \Delta_{20} \approx \Delta = \frac{WL}{2EA}$$

3-17

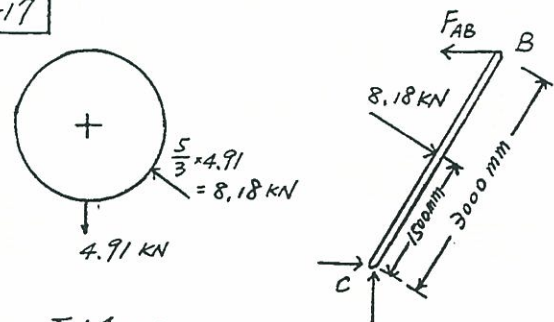

$$\sum M_c = 0$$

$$8.18 \times 1500 = F_{AB} \times 3000$$

$$F_{AB} = 5.11 \text{ kN}$$

$$\Delta = \frac{F_{AB} L}{AE} = \frac{5.11 \times 10^3 (1800)}{5 (200 \times 10^3)}$$

$$= 9.20 \text{ mm}$$

3-18

vertical bar force from C: $16 \times \frac{3}{4}$ vertical bar force from D: $16 \times \frac{4}{3}$

$$\Delta = \frac{PL}{AE} = \frac{1 \times 10^3}{100 \times 200} \times 16 \times \left(\frac{3}{4} + \frac{4}{3}\right) = 1.67 \text{ mm}$$

3-19

$$\Delta = \frac{PL}{EA} = \frac{\sigma L}{E} = \frac{15 \times 20}{30 \times 10^3}$$

 $= 0.01''$ (elongation of each rod)

$$\Delta_B = \Delta = 0.01 \text{ in}$$

$$\Delta_D = 0$$

$$\Delta_E = \Delta = 0.01 \text{ in}$$


$$\Delta_{CF} = \frac{15 \times 10}{30 \times 10^3} = 0.005 \text{ in}$$

$$\chi - \frac{1}{2} \Delta = 0.005$$

$$\chi = 0.005 + 0.005 = 0.01$$

$$\frac{\Delta_G - \Delta}{2} = 0.001$$

$$\Delta_G = 0.02 + 0.01 = 0.03 \text{ in}$$

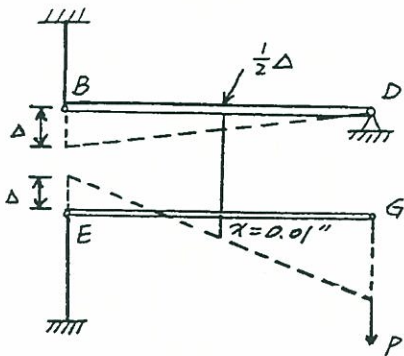

3-20

$$\Delta = \frac{WL^2}{2AE}$$

$$L^2 = \frac{2AE\Delta}{W} = \frac{2 \times 1 \times 10^6 \times 0.25}{1.17 \times 12}$$

$$= 356000 \text{ ft}^2$$

$$\therefore L = 596.76 \text{ ft}$$

3-21

$$\epsilon^n = E^{-1} \sigma, \quad \epsilon = \left(\frac{\sigma}{E}\right)^{\frac{1}{n}} = \left(\frac{Px}{Ax E}\right)^{\frac{1}{n}}$$

$$\Delta = \int_0^L \epsilon dx = \int_0^L \left(\frac{Wx}{AE}\right)^{\frac{1}{n}} dx$$

$$= \left(\frac{W}{AE}\right)^{\frac{1}{n}} \left(\frac{n}{n+1}\right) \left[\chi^{\frac{n+1}{n}}\right]_0^L$$

$$\Delta = \left(\frac{W}{AE}\right)^{\frac{1}{n}} (L)^{\frac{1}{n}} \left(\frac{n}{n+1}\right) L$$

$$= \left(\frac{W}{AE}\right)^{\frac{1}{n}} \left(\frac{n}{n+1}\right) L$$

3-22

$$(a) \quad \sigma_1 = \frac{5}{1} = 5 \text{ ksi}$$

$$\sigma_2 = \frac{5}{0.5} = 10 \text{ ksi}$$

$$\Delta = \left[\frac{5}{16000} + \left(\frac{5}{165}\right)^3\right] \times 50 + \left[\frac{10}{16000} + \left(\frac{10}{165}\right)^3\right] \times 100$$

$$= 0.102''$$

$$(b) \quad d\epsilon = \frac{1}{16000} d\sigma + \frac{3}{165^2} \sigma^2 d\sigma$$

$$E = \frac{d\sigma}{d\epsilon} \Big|_{\sigma=0} = 16000 \text{ ksi}$$


$$\Delta_E = \frac{5}{E} \times 50 + \frac{10}{E} \times 100$$

$$= \frac{5}{16000} \times 50 + \frac{10}{16000} \times 100 = 0.078''$$

$$\Delta_{\text{residual}} = \Delta - \Delta_E$$

$$= 0.102 - 0.078 = 0.024''$$

3-23



$$\sum F_y = 0$$

$$F_{AB} = \frac{1}{\sqrt{2}} + F_{BC} \frac{3}{5} = 20 \text{ k}$$

$$\sum F_x = 0$$

$$F_{AB} \left(\frac{1}{\sqrt{2}}\right) = F_{BC} \left(\frac{4}{5}\right)$$

$$\text{solve: } \Rightarrow F_{BC} = 14.3 \text{ k}$$

$$F_{AB} = 16.15 \text{ k}$$

Wire AB

$$\sigma_{0 \rightarrow 80} ; \Delta = \frac{PL}{AE} = \frac{80 \times 130 (900 \times \sqrt{2})}{130 (80 \times 10^3)} = 1.273 \text{ mm}$$

$$\sigma \rightarrow i: \Delta = \frac{PL}{AE} = \frac{(14300 - 10400)(700\sqrt{2})}{130(40 \times 10^3)} = 0.955 \text{ mm}$$

$$\Delta_{\text{Total}} = 1.27 + 0.96 = 2.23 \text{ mm}$$

Wire BC


$$\sigma \rightarrow 80: \Delta = \frac{PL}{AE} = \frac{80 \times 100(3.05 \times 10^3)}{100(80 \times 10^3)} = 3.05 \text{ mm}$$

$$80 \rightarrow \Delta = \frac{PL}{AE} = \frac{(16150 - 8000)(3.05 \times 10^3)}{100(40 \times 10^3)}$$

$$= 6.21 \text{ mm}$$

$$\Delta_{\text{Total}} = 9.26 \text{ mm}$$

3-24



$$A_x = 4 \times [5 + \frac{(20-5)}{150} x] = 4(5 + \frac{1}{10} x)$$

$$P_x = r g \times \frac{1}{2} \times 4(10 + \frac{1}{10} x) x$$

$$= r g (20 + \frac{1}{5} x) x$$

$$\Delta = \int_0^{150} \frac{P_x}{AE} dx = \int_0^{150} \frac{r g (20 + \frac{1}{5} x) x}{4(5 + \frac{1}{10} x) E} dx$$

$$= \int_0^{150} \frac{r g (100 + x) x}{(100 + 2x) E} dx$$

$$= 7637.5 \frac{r g}{E}$$

3-25


$$\Delta_A = \int_0^{L_A} \frac{P}{2E} dx = \frac{PL_A}{2E}$$

$$\Delta_B = \int_0^{L_B} \frac{P}{(1 + \frac{2x}{L_B})} dx = \frac{PL_B}{2E} \ln 3$$

$$\Delta_A = \Delta_B, \quad \frac{PL_A}{2E} = \frac{PL_B}{2E} \ln 3$$

$$\frac{L_A}{L_B} = \ln 3 = 1.10$$

3-26



$$d = \frac{x}{12}$$

$$A = \pi d^2 = \pi \left(\frac{x}{12}\right)^2$$

$$P = \left[\frac{\pi}{3} \left(\frac{x}{12}\right)^2 x - \frac{\pi}{3} \times 25^2 \times 300 \right] r$$

$$= \frac{\pi r}{3} \left(\frac{x^3}{144} - 187500 \right)$$

$$\Delta = \int_{300}^{900} \frac{P}{AE} dx = \int_{300}^{900} \frac{\pi r}{3} \frac{\left(\frac{x^3}{144} - 187500 \right)}{\pi \left(\frac{x}{12}\right)^2 E} dx$$

$$= \frac{r}{3E} \int_{300}^{900} \frac{x^3 - 27 \times 10^6}{x^2} dx$$

$$= \frac{r}{3E} \left[\frac{1}{2} x^2 + 27 \times 10^6 \frac{1}{x} \right]_{300}^{900}$$

$$= \frac{r}{3E} (36 \times 10^4 - 6 \times 10^4) = 10^5 \frac{r}{E}$$

3-27

$$P = \int_r^L \left(\frac{\partial A}{\partial r} \right) W^2 r = \frac{\partial A W^2}{2g} (L^2 - r^2)$$

$$\Delta = \int_0^L \frac{2P dr}{AE} = 2 \int_0^L \frac{\partial A W^2}{2g} (L^2 - r^2) \frac{dr}{AE}$$

$$= \frac{r W^2}{gE} \left[L^2 r - \frac{r^3}{3} \right]_0^L = \frac{2 r W^2 L^3}{3gE}$$

3-28

$$F = \int_a^x -k x' dx' = -\frac{1}{2} k x'^2 \Big|_a^x$$

$$= -\frac{k}{2} (x^2 - a^2)$$

$$\Delta = \int_a^{2a} \frac{F dx}{AE} = \int_a^{2a} \frac{-k}{2EA} (x^2 - a^2) dx$$

$$= \frac{-k}{2AE} \left(\frac{x^3}{3} - a^2 x \right) \Big|_a^{2a}$$

$$= -\frac{k}{2AE} \left[\frac{1}{3} (8a^3 - a^3) - a^2 (2a - a) \right] = \frac{-2ka^3}{3EA}$$

$$P = \int_a^{2a} k x dx = \frac{k x^2}{2} \Big|_a^{2a} = \frac{k}{2} (4a^2 - a^2)$$

$$= \frac{3ka^2}{2} \Rightarrow k = \frac{2P}{3a^2}$$

$$\therefore \Delta = -\frac{2a^3}{3EA} \times \frac{2P}{3a^2} = -\frac{4Pa}{9EA}$$

3-29

$$\begin{cases} F_{AB} \sin 26.6^\circ = F_{BC} \sin 45^\circ \\ F_{AB} \cos 26.6^\circ + F_{BC} \cos 45^\circ = 3 \end{cases} \Rightarrow F_{AB} = 2.24 \text{ kips} \\ F_{BC} = 1.42 \text{ kips}$$

$$\Delta_{AB} = \frac{2.24 \times 6.71}{0.25 \times 0.5 \times 10.6 \times 10^3} = 0.0113 \text{ in}$$


$$\Delta_{BC} = \frac{1.42 \times 8.49}{0.25 \times 0.875 \times 10.6 \times 10^3} = 5.20 \times 10^{-3} \text{ in}$$

$$GF = \frac{\Delta_{AB}}{\cos 26.6^\circ} - \frac{\Delta_{BC}}{\cos 45^\circ} = 5.28 \times 10^{-3} \text{ in}$$



$$GF = \Delta y + \Delta y / \tan 63.4^\circ = 5.28 \times 10^{-3} \text{ in}$$

$$\therefore \Delta y = 3.52 \times 10^{-3} \text{ in}$$

$$\Delta x = \frac{\Delta_{BC}}{\cos 45^\circ} + \Delta y = 0.0109 \text{ in}$$

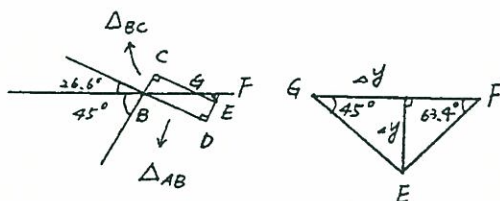

$$\begin{aligned} \Delta y &= \sqrt{2} \times \Delta_{AB} - \Delta x \\ &= \sqrt{2} \times 0.007321 - 0.00375 \\ &= 0.009978 \text{ in} \end{aligned}$$

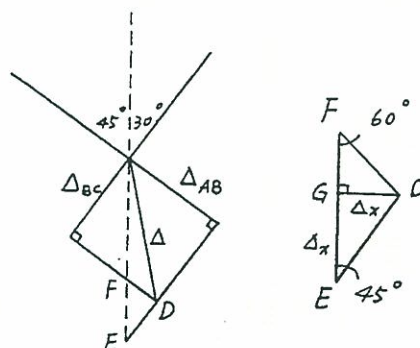

3-30

$$\Sigma F = 0, \frac{1}{\sqrt{2}} F_{AB} + \frac{\sqrt{3}}{2} F_{BC} = 10 \quad F_{AB} = 5.177 \text{ k}$$

$$\frac{1}{\sqrt{2}} F_{AB} = \frac{1}{2} F_{BC} \Rightarrow F_{BC} = 7.321 \text{ k}$$

$$\Delta_{AB} = \left(\frac{PL}{AE} \right)_{AB} = \frac{5.177 \times 100 \sqrt{2}}{10^4} = 0.07321 \text{ in}$$


$$\Delta_{BC} = \left(\frac{PL}{AE} \right)_{BC} = \frac{7.321 \times 100 \times \frac{\sqrt{3}}{2}}{10^4} = 0.08454 \text{ in}$$

$$\begin{aligned} EF &= \sqrt{2} \times \Delta_{AB} - \frac{2}{\sqrt{3}} \times \Delta_{BC} \\ &= \sqrt{2} \times 0.07321 - \frac{2}{\sqrt{3}} \times 0.08454 \\ &= 0.00592 \end{aligned}$$

$$EF = \frac{\Delta x}{\sqrt{3}} + \Delta x = 0.00592$$

$$\Delta x = 0.00375 \text{ in}$$

3-31

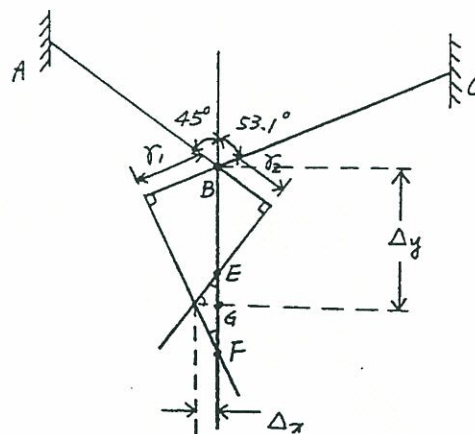

From Prob. 3-23

$$\gamma_1 = \frac{(14.3 \times 10^3) \times (3.05 \times 10^3)}{100 \times 80 \times 10^3} = 5.45 \text{ mm}$$

$$\gamma_2 = \frac{(16.15 \times 10^3) \times (0.9 \sqrt{2} \times 10^3)}{130 \times 80 \times 10^3} = 1.98 \text{ mm}$$

$$BF = BE + \Delta_x \tan 45^\circ + \frac{\Delta_x}{\tan 36.9^\circ}$$

$$\text{where } BF = \frac{r_1}{\cos 53.1^\circ}, \quad BE = \frac{r_2}{\cos 45^\circ}$$

$$\Delta_x = \frac{\frac{r_1}{\cos 53.1^\circ} - \frac{r_2}{\cos 45^\circ}}{\tan 45^\circ + \frac{1}{\tan 36.9^\circ}} = 2.69 \text{ mm}$$


$$\Delta_y = \Delta_x + BE = 5.49 \text{ mm}$$

3-32


$$\Delta_{AB} = 8.656 \times 10^{-3} \text{ in}$$

$$\Delta_{BC} = 0$$

$$\begin{aligned} \Delta_T &= \frac{\Delta_{AB}}{\cos 18.4^\circ} \\ &= \frac{8.656 \times 10^{-3}}{\cos 18.4^\circ} \\ &= 9.122 \times 10^{-3} \text{ in} \end{aligned}$$



3-33



(a) crane stiffness

$P = 1$ (unit force)

$$P_{AB} \times \frac{1}{2} = 1$$

$$\Rightarrow P_{AB} = 2 \text{ (tensile)}$$

$$P_{BC} = P_{AB} \times \frac{\sqrt{3}}{2} = 1.732 \text{ (compressive)}$$


$$\begin{aligned} \Delta_{AB} &= \frac{PL}{AE} = \frac{2(2000 \times \frac{2}{\sqrt{3}})}{3 \times 10^{-4} (200 \times 10^9)} \\ &= 7.70 \times 10^{-5} \text{ mm} \end{aligned}$$

$$\begin{aligned} \Delta_{BC} &= \frac{1.732 \times 2000}{(3.2 \times 10^{-4})(200 \times 10^9)} \\ &= 5.41 \times 10^{-5} \text{ mm} \end{aligned}$$

$$\begin{aligned} EG &= \Delta_{BC} + \frac{\sqrt{3}}{2} \Delta_{AB} \\ &= 1.21 \times 10^{-4} \text{ mm} \end{aligned}$$

$$\chi = EG \times \sqrt{3} + \frac{1}{2} \Delta_{AB} = 2.48 \times 10^{-4} \text{ mm}$$

$$K = \frac{P}{\Delta} = \frac{1}{2.48 \times 10^{-7}} = 4.0 \times 10^6 \text{ N/m}$$



(b) Deflection from 16 kN

$$\begin{aligned} \Delta &= \frac{P}{K} = \frac{16 \times 10^3}{4.0 \times 10^6} = 4.0 \times 10^{-3} \text{ m} \\ &= 4.0 \text{ mm} \end{aligned}$$


3-34

$$\Delta = \frac{mg}{K}$$

$$f = \frac{1}{2\pi} \sqrt{\frac{g}{\Delta}} = \frac{1}{2\pi} \sqrt{\frac{K}{m}}$$

$$= \frac{1}{2\pi} \sqrt{\frac{4.0 \times 10^6}{2000}} = 7.12 \text{ Hz}$$

3-35

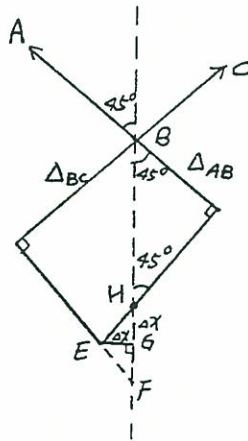

$$\alpha = 13.0 \times 10^{-6} \text{ per } ^\circ\text{F}$$

$$\Delta_{AB} = 100 \times 13 \times 10^{-6} \times 900 \sqrt{2}$$

$$= 1.655 \text{ mm}$$

$$\Delta_{BC} = 100 \times 13 \times 10^{-6} \times 3050$$

$$= 3.965 \text{ mm}$$


$$HF = \frac{5}{3} \Delta_{BC} - \sqrt{2} \Delta_{AB} = 4.268 \text{ mm}$$

$$HF = \Delta x + \Delta x \times \frac{4}{3} = 4.268 \text{ mm}$$

$$\Delta x = 1.829 \text{ mm}$$

$$\Delta y = \sqrt{2} \Delta_{AB} + \Delta x = 4.170 \text{ mm}$$

3-36

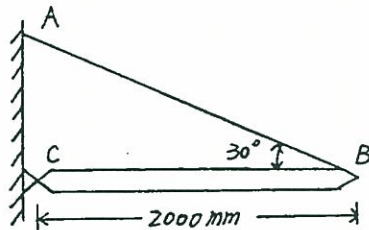


$$\Delta_{BC} = 0$$

$$\Delta_{AB} = 11.7 \times 10^{-6} (2000 \times \frac{2}{\sqrt{3}}) (80^\circ)$$


$$= 2.162 \text{ mm}$$

$$\Delta x = \Delta_{BC} = 0$$

$$\Delta y = \frac{\Delta_{AB}}{\cos 60^\circ} = 4.324 \text{ mm}$$



3-37



from graph
on fig. 3-11

$$K = 2.18$$

$$P = \frac{\sigma A}{K} = \frac{0.22 (75-25) \times 6}{2.18} = 30.28 \text{ kN}$$

3-38

from graph on Fig. 3-11,

$$K = 1.75$$

$$\frac{\sigma}{\sigma_{\max}} = \frac{\frac{P}{A}}{K \frac{P}{A}} = \frac{1}{K} = \frac{1}{1.75} = 0.57$$

3-39

$$\frac{Y_1}{d} = \frac{8}{40} = 0.20, \quad K_1 = 1.63$$

$$\Rightarrow P_1 = \frac{40 \times 10 \times 60}{1.63} = 14.7 \text{ kN}$$

$$\frac{Y_2}{d} = \frac{12}{60} = 0.20, \quad K_2 = 2.30$$

$$\Rightarrow P_2 = \frac{(60-24) \times 10 \times 60}{2.30} = 9.4 \text{ kN}$$

3-40

small bar $\frac{Y}{d} = \frac{6}{20} = 0.3, \quad K_1 = 1.53$

bend $\frac{Y}{d} = \frac{20}{35} = 0.57, \quad K_2 = 1.37$

pin hole $\frac{Y}{d} = \frac{10}{50} = 0.2, \quad K_3 = 2.3$

(a) $P_1 = \frac{80}{1.53} \times 20 t_1 = 12000$


$$\Rightarrow t_1 = 11.5 \text{ mm}$$

$$P_2 = \frac{80}{1.37} \times 35 t_2 = 12000$$

$$\Rightarrow t_2 = 5.9 \text{ mm}$$

$$P_3 = \frac{80}{2.3} \times 30 t_3 = 12000$$

$$\Rightarrow t_3 = 11.5 \text{ mm}$$



(b) The potential fracture might occur in the pin hole section.

3-41

Number of cycles: 10×10^6 \Rightarrow stress amplitude 185 MPa

$$\frac{Y_1}{d} = \frac{2}{10} = 0.2 \Rightarrow K_1 = 1.63$$

$$\Rightarrow \sigma_{1\max} = 1.63 \times 185 = 301.55 \text{ MPa}$$

$$\text{or } 301.55 \times 10 \text{ mm}^2 = 3015.5 \text{ N} \\ = 3.0155 \text{ kN}$$

$$\frac{Y_2}{d} = \frac{4}{20} = 0.2 \Rightarrow K_2 = 2.30$$

$$\Rightarrow \sigma_{2\max} = 2.30 \times 185 = 425.5 \text{ MPa}$$

$$\text{or } 425.5 \times (20-8) \times 1 = 5106 \text{ N} \\ = 5.106 \text{ kN}$$

3-42

(a) from graph on Fig. 3-11,

$$\frac{Y}{D} = \frac{10}{60} = \frac{1}{6}, \quad K = 2.35$$

$$\sigma_{\max} = K \frac{P}{A} = 2.35 \times \frac{300}{60 \times 10} = 1.175 \text{ GPa}$$

$$(b) \Delta = \sum \frac{PL}{AE} = \frac{300 \times 120}{200 \times 60 \times 10} + \frac{300 \times 120}{200 \times 40 \times 10} \\ = 0.75 \text{ mm}$$

$$(c) \Delta = 0.02 \times 120 + \frac{350 \times 120}{200 \times 60 \times 10} = 2.75 \text{ mm}$$

$$(d) \Delta_{\text{res}} = \Delta - \Delta_E \\ = 2.75 - \left(\frac{350 \times 120}{200 \times 60 \times 10} + \frac{350 \times 120}{200 \times 40 \times 10} \right) \\ = 2.75 - 0.875 = 1.875 \text{ mm}$$

3-43

for aluminum,

$$U_{r, \text{elastic}} = \frac{44^2}{2 \times 10.6} = 91.32 \text{ psi}$$

$$U_{r, \text{hyper}} = \frac{60^2}{2 \times 10.6} = 169.81 \text{ psi}$$

$$\text{for magnesium, } U_{r, \text{elastic}} = \frac{22^2}{2 \times 6.5} = 37.23 \text{ psi}$$

$$U_{r, \text{hyper}} = \frac{40^2}{2 \times 6.5} = 123.68 \text{ psi}$$

$$\text{for steel, } U_{r, \text{elastic}} = \frac{36^2}{2 \times 30} = 21.6 \text{ psi}$$

$$U_{r, \text{hyper}} = \frac{65^2}{2 \times 30} = 325 \text{ psi}$$

3-44

for bar 12,

$$U \approx \frac{18.33 \times 0.5}{\frac{\pi}{4} \times 0.505^2 \times 0.5} = 91.51 \text{ ksi}$$

for bar 15,

$$U \approx \frac{18.33 \times 1}{\frac{\pi}{4} \times 0.505 \times 3.5} = 26.15 \text{ ksi}$$

3-45

from example 3-4

$$\sigma_{AB} = 17.8 \text{ ksi}, \quad P_{AB} = 2.23 \text{ kips}$$

$$L_{AB} = 6.71''$$


$$\sigma_{BC} = 12.9 \text{ ksi}, \quad P_{BC} = 2.83 \text{ kips}$$

$$L_{BC} = 8.49''$$

$$\frac{P\Delta}{2} = \sum \frac{\sigma^2}{2E} AL = \sum \frac{\sigma PL}{2E}$$

$$\Delta = \frac{1}{3 \times 10.6 \times 10^3} [17.8 \times 2.23 \times 6.71 + \\ 12.9 \times 2.83 \times 8.49] \\ = 0.018''$$

3-46



$$P = 300 \text{ lbs}$$

$$\text{Forces: } \sum M_F = 0 \Rightarrow F_{EH} = 300 \text{ lbs}$$

$$\sum M_E = 0 \Rightarrow F_{CF} = 600 \text{ lbs}$$

$$A_{CF} = \frac{F_{CF}}{\sigma} = \frac{600}{15 \times 10^3} = 0.04 \text{ in}^2$$

$$\sum M_D = 0 \Rightarrow F_{AB} = 300 \text{ lbs}$$

$$A_{AB} = \frac{F_{AB}}{\sigma} = \frac{300}{15 \times 10^3} = 0.02 \text{ in}^2$$


$$U = \frac{1}{2} \left[\left(\frac{P^2 L}{AE} \right)_{AB} + \left(\frac{P^2 L}{AE} \right)_{CF} + \left(\frac{P^2 L}{AE} \right)_{EH} \right]$$

$$= \frac{1}{2} P \Delta$$

$$P \Delta = \left[\frac{0.3^2 \times 20}{30 \times 10^3 \times 0.02} + \frac{0.3^2 \times 10}{30 \times 10^3 \times 0.02} + \frac{0.6^2 \times 20}{30 \times 10^3 \times 0.04} \right]$$

$$\therefore \Delta = 0.035 \text{ in}$$

3-47



$$\sum F_y = 0 \Rightarrow F_{AB} \cos 45^\circ + F_{CB} \cos 30^\circ = 10 \text{ k}$$


$$\sum F_x = 0 \Rightarrow F_{AB} \sin 45^\circ + F_{CB} \sin 30^\circ = 0$$

$$\text{solve, } F_{AB} = 5.177, F_{CB} = 7.231$$

$$U = \frac{1}{2} \frac{(5.177)^2 \times 14.4}{10^4} + \frac{1}{2} \frac{(7.231)^2 \times 115.5}{10^4} = \frac{10}{2} \Delta$$

$$\Rightarrow \Delta = 0.0998 \text{ in}$$

3-48

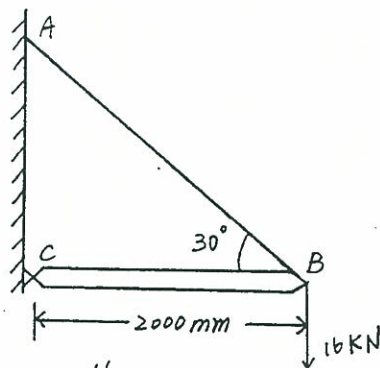

$$P_{AB} = \frac{16}{\sin 30^\circ} = 32 \text{ kN}$$

$$P_{BC} = 27.712 \text{ kN}$$


$$\frac{1}{2} P \Delta = \frac{1}{2} \frac{P_{AB}^2 L_{AB}}{A_{AB} E} + \frac{1}{2} \frac{P_{BC}^2 L_{BC}}{A_{BC} E}$$

$$\Rightarrow \frac{(32 \times 10^3)^2 (2.31)}{(300 \times 10^6) (200 \times 10^9)} + \frac{(27.712 \times 10^3)^2 (2.0)}{(320 \times 10^6) (200 \times 10^9)}$$

$$= 16 \times 10^3 \Delta$$

$$\Rightarrow \Delta = 0.004 \text{ m} = 4 \text{ mm}$$

3-49

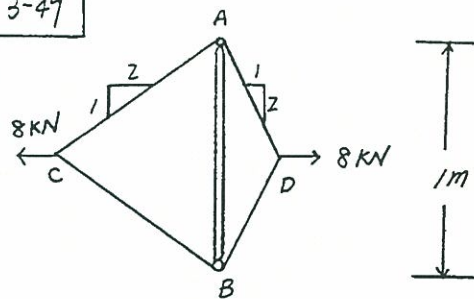

$$T_{AD} = T_{DB} = 8.94 \text{ kN}$$

$$T_{CB} = T_{CA} = 4.47 \text{ kN}$$

$$T_{AB} = 8 \text{ kN} + 2 \text{ kN} = 10 \text{ kN}$$

$$\frac{1}{2} \times 2 \times \frac{(4.47 \times 1000)^2 \times 1.118}{20 \times 200 \times 1000}$$

$$+ \frac{1}{2} \times 2 \times \frac{(8.94 \times 1000)^2 \times 0.559}{40 \times 200 \times 1000}$$

$$+ \frac{1}{2} \frac{(10 \times 1000)^2 \times 1}{10 \times 200 \times 1000} = \frac{1}{2} \times 8.0 \Delta$$

$$\Delta = 3.42 \text{ mm}$$

3-50 static force = $mg = 1.5 \times 9.81$

$$= 14.715$$

$$\text{Bar 'A'} \Rightarrow \Delta_{ST} = \frac{PL}{AE} = \frac{14.7(2000)}{5^2 \pi (200 \times 10^3)}$$

$$= 0.0019 \text{ mm}$$

$$\sigma_{\max} = \frac{14.7}{5^2 \pi} \left(1 + \sqrt{1 + \frac{2 \times 1000}{0.0019}} \right) = 192.3 \text{ MPa}$$

$$\text{Bar 'B'} \Rightarrow \Delta_{ST} = \frac{PL}{AE} = \frac{14.7 \times 2000}{\left(\frac{1.5}{2}\right)^2 \pi (200 \times 10^3)}$$

$$= 0.0008 \text{ mm}$$

$$\sigma_{\max} = \frac{14.7}{\frac{1.5^2}{4} \pi} \left(1 + \sqrt{1 + \frac{2000}{0.0008}} \right) = 131.6 \text{ MPa}$$

$$\text{Bar 'C'} \Rightarrow \Delta_{ST} = \frac{14.7(1000)}{78.5(200 \times 10^3)} + \frac{14.7(1000)}{\frac{1.5^2}{4} \pi (200 \times 10^3)}$$

$$= 1.35 \times 10^{-3} \text{ mm}$$

for lower rod

$$\sigma_{\max} = \frac{14.7}{78.5} \left(1 + \sqrt{1 + \frac{2000}{1.35 \times 10^{-3}}} \right) = 228.1 \text{ MPa}$$

for upper rod

$$\sigma_{\max} = \frac{78.5}{176.7} \times 228.1 = 101.3 \text{ MPa}$$

3-51

$$\Delta = 200 \text{ mm}$$

$$u = \frac{1}{2} k \Delta^2 = \frac{1}{2} m v^2$$

$$\Rightarrow k = \frac{m v^2}{\Delta^2} = \frac{(1 \text{ kg}) 3^2}{(0.02 \text{ m})^2}$$

$$= 45000 \text{ N/m}$$

$$= 45 \text{ kN/m}$$